

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 litre

LL5450001 6/22

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. May be harmful if swallowed and enters airways. Causes skin irritation. May cause an allergic skin reaction. Causes serious eye irritation. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Toxic to aquatic life with long lasting effects.

PRECAUTIONS

AVOID BREATHING MIST, VAPOURS OR SPRAY.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Use personal protective equipment as required. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use only non-sparking tools. Avoid release to the environment. Obtain special instructions before use.

FIRST AID

IF SWALLOWED: Do NOT induce vomiting. Immediately call a POISON CENTRE, doctor or first aider.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

If exposed or concerned get medical advice or attention. If medical advice is required have product container or label at hand. Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Solvent Naphtha Petroleum, medium Aliphatic 120-400 g/L, Naphtha Petroleum, heavy Hydrodesulphurised 10-140 g/L.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D411.

SPILLS: Clean up spillage. Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums.

Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Minimise water used for washing. Dispose of wash-up water onto grassy/unsealed area away from food crop growing areas and NOT into outside stormwater drain where it may harm fish in local waterways. See resene.com/cleanup for cleaning instructions.

FIRE: Use foam, carbon dioxide or dry chemical powder.

WARNING

KEEP OUT OF REACH OF CHILDREN

Resene ArmourX GP Metal Primer general purpose



Resene ArmourX GP Metal Primer is an all-purpose high build primer for metals. Based on a non saponifiable resin and a blend of anti-corrosive pigments. Specially developed for priming a range of new and weathered metals.

Preparation

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).
- Waterblasting is the best surface preparation prior to repainting of weathered galvanised steel and Zincalume.
- Treat areas of moss, mould or lichen growth with Resene Moss & Mould Killer (see Data Sheet D80). Extended times will be required to ensure lichen growth will detach from the substrate. Remove all loose or flaking paint and wash thoroughly as above (waterblasting will assist removal of lichen growth). Pay particular attention to paint immediately adjacent to flaking areas as adhesion is often suspect.
- Remove oil and grease using Resene Roof and Metal Wash (see Data Sheet D88). Flush clean with water.
- Remove all loose corrosion products (red or white rusting) by thorough power wire brushing or use of a sacrificial disc such as 3M Rust and Paint Removal disc. Spot prime bare areas with Resene ArmourX GP Metal Primer. For badly corroded areas apply an additional coat of Resene ArmourX GP Metal Primer or consult the Resene Engineered Coating Systems Division for specialist advice.
- Areas showing significant red rusting will require an additional coat of Resene ArmourX GP Metal Primer or a change to Resene Rust-Arrest (see Data Sheet RA30A).
- May be used on roofs that are to be used for the collection of drinking water when topcoated. If roof is used for the collection of drinking water disconnect downpipes until total paint system has been applied and has received its first heavy shower of rain. Divert run-off water to a grassed area for the first two to three showers.

- **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**
- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsond or not referred to, contact your local Resene ColorShop or reseller.


- **Application**
- Apply Resene ArmourX GP Metal Primer by brush, roller or spray (may require judicious thinning). Thinning requirements will vary with application method. On weathered surfaces, brush or roller application is preferred to provide the mechanical force to work the surface for intimate contact.

- For new work/weathered unpainted, the best results are obtained by brush to ensure maximum contact with the metal. Apply one full coat

of Resene ArmourX GP Metal Primer and allow at least 12 hours before recoating (primer must be hard dry to overcoat). For severe marine exposures and non-rainwashed areas, such as the undersides of metal gutters, apply a second coat of Resene ArmourX GP Metal Primer.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your painting on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.

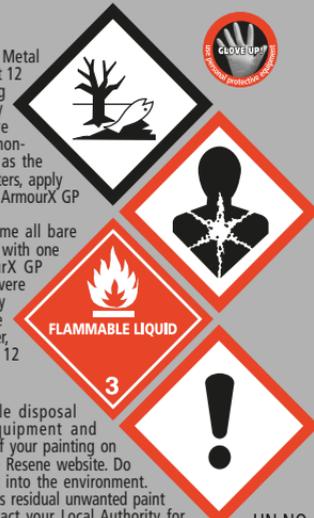

FLAMMABLE LIQUID

3

UN NO.
1263 - PAINT
RELATED MATERIAL



GP Metal Primer
SDS



GP Metal Primer
TDS

Resene

the paint the professionals use

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 918, Ashmore City, Qld 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wigram Mail Centre,
Lower Hutt 5045
Ph (04) 572 0500 Visit resene.co.nz

Resene

Automotive & Light Industrial

Resene Automotive & Light Industrial
PO Box 62282, Sylvia Park, Auckland 1644
Call (09) 259 2738, Fax (09) 259 2937
visit reseneauto.co.nz
or email us at
info@reseneauto.co.nz

Made in manufacturing facilities which comply with ISO 9001 and ISO 14001. Printed on paper produced in manufacturing facilities which comply with environmental management systems EMAS and ISO 14001, using vegetable-based inks. Please recycle.

Quick check

Use on: Aluminium, galvanising, repaints, steel and Zincalume.

Gloss level: Satin.

Coverage: 7 square metres per litre per coat.

Dry time (minimum): 5 hours at 18°C (depends upon film build).

Recoat time (minimum): 12 hours. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Usual number of coats: Usually one.

Application method: Brush, roller or spray.

Thinning and clean up: Brush/roller: Mineral turps or Resene Thinner No.2. Spray: Resene Thinner No.6.

Colour range: Light grey.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

FLAMMABLE LIQUID AND VAPOUR

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.