

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes skin irritation. May damage fertility or the unborn child. Toxic to aquatic life with long lasting effects.

PRECAUTIONS

AVOID BREATHING FUMES, VAPOURS, SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing. Wash all exposed external body areas thoroughly after handling. Avoid release to the environment. Obtain special instructions before use.

FIRST AID

IF SWALLOWED: Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation occurs get medical advice. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider. If exposed or concerned, seek medical advice.

When seeking medical advice take this container with you.

Further information can be obtained from
AUST: POISONS INFORMATION CENTRE 131 126
or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)
or call Resene 0800 737 363.

For use as a surface preparation coating.

Contains: Dibutyl Phthalate 10-70 g/L.

For full technical instructions see Data Sheet D402.

SPILLS: Clean up spillage. Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

Use
with a Resene
CoolColour topcoat for
a Resene CoolColour
System.


DANGER
KEEP OUT OF REACH OF CHILDREN

Resene

Galvo-Prime

galvanised steel primer

waterborne exterior

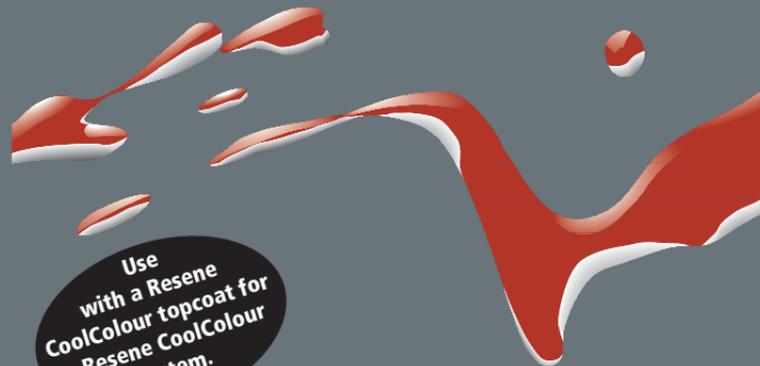

Resene Galvo-Prime is a waterborne galvanised steel primer designed for use over galvanised steel and Zinalume. Matches its solventborne analogues even in marine exposures.

Preparation

• Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.

• Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).

• Wherever oil and grease are present and when painting new galvanised steel or Zinalume, ensure the surface to be painted is thoroughly cleaned using Resene Roof and Metal Wash (see Data Sheet D88). Flush clean with water.

• Disconnect downpipes until the total system has been applied and received its first heavy shower of rain before using for the collection of drinking water. Divert run-off water to a grassed area for the first two to three showers.

• **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old asbestos containing building materials may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**

• Consult your Resene ColorShop or reseller for technical advice on painting of badly rusted roofs.

• This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or reseller.

Application

• Resene Galvo-Prime is best applied by brush to ensure full surface wetting of substrate is achieved.

• Galvanised steel or Zinalume should not be allowed to weather. Apply Resene Galvo-Prime as soon as practical after erection. If the galvanised steel or Zinalume has weathered use only Resene Galvo One (see Data Sheet D41).

• When repainting spot prime all bare areas with one coat of Resene Galvo-Prime.

• For new work apply one full coat of Resene Galvo-Prime and allow at least two hours before recoating.

• If due to climatic conditions foam persists after rolling, add 5% Resene Hot Weather Additive to Resene Galvo-Prime, roll on and lay off with a brush. Foam craters create weak spots in the protective system.

Overcoating


• For marine exposure apply a second coat of Resene Galvo-Prime.

• Resene Galvo-Prime has been developed for use under Resene waterborne roof paints.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

UN 3082, ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (PAINTS)

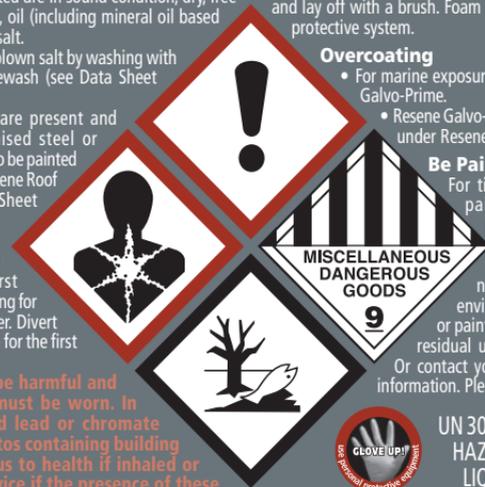

Galvo-Prime SDS

Resene

the paint the professionals use



Galvo-Prime TDS

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Quick check

Use on: Suitably prepared new or corrosion free galvanised steel or Zinalume.

Gloss level: Satin.

Coverage: 12 square metres per litre per coat.

Dry time (minimum): 30 minutes at 18°C. Do not apply at temperatures below 10°C or when the temperature is liable to drop below this during the drying period. Drying is slowed by low temperatures and high humidity.

Recoat time (minimum): 2 hours at 18°C.

Usual number of coats: One. Second coat required in marine exposures.

Application method: Brush, roller or spray.

Thinning: In hot conditions may be thinned with up to 5% Resene Hot Weather Additive to slow drying.

Clean up: Water.

Colour range: Light green.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.